

**IZJAVA O LASTNOSTIH**  
**DECLARED PERFORMANCE**  
**TRANSPORTNI DOKUMENT/ Izjava št.**
**01** №

1. Tip, kakovost: vroče valjan proizvod v skladu z **EN 10025-2:2004**.  
 Tip: S235 kakovost: JR,J0,J2.  
*Type, quality: hot rolled product in agreement with EN 10025-2:2004.*  
 Type: S235 grade: JR,J0,J2.
2. Predvidena uporaba gradbenega proizvoda: vroče valjani proizvodi iz konstrukcijskega jekla.  
*Intended use of the construction product: hot rolled products of structural steel.*
3. Ime in naslov proizvajalca:  
*Name and address of the manufacturer:*  
 DUFERCO TRAVI E PROFILATI S.p.A. stabilimento Giammoro  
 Zona Industriale Giammoro  
 98042 Pace del Mela (ME), Italia  
 Tel. +39090938611- fax +390909385368
4. Ni določen
5. Sistem ocenjevanja in preverjanja nespremenljivosti lastnosti gradbenega proizvoda:  
*System of evaluation and verification of constancy of performance of the construction product:*  
**2+**
- 6a. Harmonizirani standard: **EN 10025-1:2004**  
 Harmonized standard: **EN 10025-1:2004**  
 Priglašeni organ, ki je izdal certifikat o skladnosti tovarniške kontrole proizvodnje / *Notified body that issued the certificate of conformity of the factory production control:*  
 № 1608 IGQ

**7. Navedene lastnosti / Declared performance**


Bistvene značilnosti / Essential characteristic	Lastnost / performance		Harmonizirana tehnična specifikacija / Harmonized technical specification
Tolerance dimenzij in oblike / tolerances on dimensions and shape	EN10034 : 1993 EN10034 : 1993 EN10024 : 1995 EN10279 : 2000 EN10056-2 : 1993  EU91 : 1981 / DIN59200 : 2001 BS4-1 : 2005  EN 10059: 2003 EN 10060: 2003	- razdelki HEA/B/M/ Sections HEA/B/M: 80 + 500.. - razdelki I/ Sections I: IPE80 + IPE550. - razdelki IPN/ Sections IPN: 80 + 400. - U in UPN razdelki / U and UPN sections: 30 + 120 mm. - enakokraki in neenakokraki kotniki / Equal and unequal leg angles: širina / width 30 + 80, debelina do/up to 12 mm. - široko ploščato jeklo / wide flats : širina/ width 30 + 550 mm, debelina/thickness 5 + 40 mm. - BS univerzalne grede in stebri z debelino prirobnice do 12 mm / British universal beams and columns with flange thickness up to 12 mm - kvadratne palice / Square bars: 10 + 50 mm. - okrogle palice / Round bars: 12 + 50 mm.	EN 10025-1:2004
Napetost tečenja / yield strength (MPa)	Tip /kakovost Type/grade <b>S235JR/J0/J2</b>	Nominalna debelina v mm / nominal thickness in mm ≤ 16   > 16 + ≤ 40   > 40 + ≤ 63 ≥ 235   ≥ 225   ≥ 215	
Natezna trdnost / tensile strength (MPa)	Tip /kakovost Type/grade <b>S235JR/J0/J2</b>	Nominalna debelina v mm / nominal thickness in mm ≥ 3 + ≤ 100 360 + 510	
Raztezek / elongation %	Tip /kakovost Type/grade <b>S235JR/J0</b> <b>S235J2</b>	Nominalna debelina v mm / nominal thickness in mm ≥ 3 + ≤ 40   > 40 + ≤ 63 ≥ 26   ≥ 25 ≥ 24   ≥ 23	
Udarna trdnost / impact strength	Tip /kakovost Type/grade	Nominalna debelina v mm / nominal thickness in mm ≤ 150	
	Temperatura /temperature (°C)	KV min	
	<b>S235JR</b> <b>S235J0</b> <b>S235J2</b>	20 0 - 20	
Varivost / weldability CEV% max	Tip /kakovost Type/grade <b>S235JR/J0/J2</b>	Nominalna debelina v mm / nominal thickness in mm ≤ 30   > 30 + ≤ 40   > 40 + ≤ 150 0,36     0,38	
Trajnost / durability	<b>S235JR/J0/J2</b>	NPD (lastnost ni določena)	

- Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj. *The performance of the product is in conformity with the declared performance in this document. This declaration of performance is issued under the sole responsibility of the manufacturer mentioned above.*  
 Podpisal za in v imenu proizvajalca: /Signed for and on behalf of the manufacturer by:

Giuliano Bo , vodja obrata / Plant manager

Pace del Mela, 19/01/21



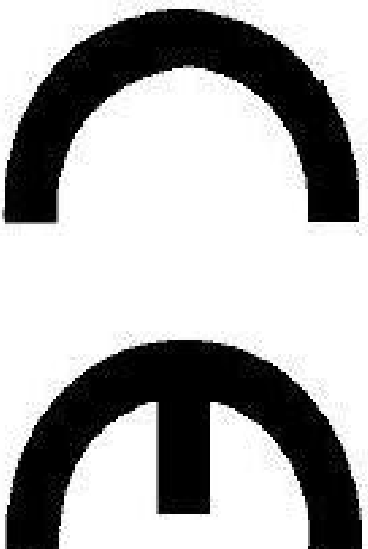

1608

**DUFERCO TRAVI E PROFILATI S.p.A., Zona Industriale Giammoro, 98042 Pace del Mela (ME) Italia**

09

1608 CPR P089

EN10025-1:2004

**S235JR +AR**

Predvidena uporaba za proizvode iz konstrukcijskega jekla.

*Intended to be used on products for structural steel.*

Tolerance /tolerances:

Napetost tečenja /Yield strength

Natezna trdnost / tensile strength

Raztezek / elongation

Udarna trdnost / impact strength

Varivost / weldability CEV

: Izraženo kot navedeno v DoP  
*Espressed as indicated in the DoP*

Trajnost / durability:

NPD