

02 №

 IZJAVA O LASTNOSTIH
 DECLARED PERFORMANCE
 TRANSPORTNI DOKUMENT/ Izjava št.

- Tip, kakovost: vroče valjan proizvod v skladu z EN 10025-2:2004.
 Tip: S275 kakovost: JR,J0,J2.
Type, quality: hot rolled product in agreement with EN 10025-2:2004.
 Type: S275 grade: JR,J0,J2.
- Predvidena uporaba gradbenega proizvoda: vroče valjani proizvodi iz konstrukcijskega jekla.
Intended use of the construction product: hot rolled products of structural steel.
- Ime in naslov proizvajalca:
Name and address of the manufacturer:
 DUFERCO TRAVI E PROFILATI S.p.A. stabilimento Giammoro
 Zona Industriale Giammoro
 98042 Pace del Mela (ME), Italia
 Tel. +39090938611- fax +390909385368
- Ni določen
- Sistem ocenjevanja in preverjanja nespremenljivosti lastnosti gradbenega proizvoda:
System of evaluation and verification of constancy of performance of the construction product:
 2+
- 6a. Harmonizirani standard: EN 10025-1:2004
 Harmonized standard: EN 10025-1:2004
 Priglašeni organ, ki je izdal certifikat o skladnosti tovarniške kontrole proizvodnje / Notified body
 that issued the certificate of conformity of the factory production control:
 № 1608 IGQ

7. Navedene lastnosti / Declared performance


Bistvene značilnosti / Essential characteristic	Lastnost / performance		Harmonizirana tehnična specifikacija / Harmonized technical specification
Tolerance dimenzij in oblike / tolerances on dimensions and shape	EN10034 : 1993 EN10034 : 1993 EN10024 : 1995 EN10279 : 2000 EN10056-2 : 1993 EU91 : 1981 / DIN59200 : 2001 BS4-1 : 2005 EN 10059: 2003 EN 10060: 2003	- razdelki HEA/B/M/ Sections HEA/B/M: 80 + 500.. - razdelki I/ Sections I: IPE80 = IPE550. - razdelki IPN/ Sections IPN: 80 + 400. - U in UPN razdelki / U and UPN sections: 30 + 120 mm. - enakokraki in neenakokraki kotniki / Equal and unequal leg angles: širina / width 30 + 80, debelina do/ up to 12 mm. - široko ploščato jeklo / wide flats : širina/ width 30 + 550 mm, debelina/thickness 5 + 40 mm. - BS univerzalne grede in stebri z debelino prirobnice do 12 mm / British universal beams and columns with flange thickness up to 12 mm - kvadratne palice / Square bars: 10 + 50 mm. - okrogle palice / Round bars: 12 + 50 mm.	EN 10025-1:2004
Napetost tečenja / yield strength (MPa)	Tip /kakovost Type/grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0/J2	≤ 16 > 16 + ≤ 40 > 40 + ≤ 63 ≥ 275 ≥ 265 ≥ 255	
Natezna trdnost / tensile strength (MPa)	Tip /kakovost Type/grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0/J2	≥ 3 + ≤ 100 410 + 560	
Raztezek / elongation %	Tip /kakovost Type/grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0 S275J2	≥ 3 + ≤ 40 > 40 + ≤ 63 ≥ 23 ≥ 22 ≥ 21 ≥ 20	
Udarna trdnost / impact strength	Tip /kakovost Type/grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR S275J0 S275J2	≤ 150 Temperatura /temperature (°C) KV min 20 27 0 27 - 20 27	
Varivost / weldability CEV% max	Tip /kakovost Type/grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0/J2	≤ 30 > 30 + ≤ 40 > 40 + ≤ 150 0,41 0,43	
Trajnost / durability	S275JR/J0/J2	NPD (lastnost ni določena)	

- Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj. *The performance of the product is in conformity with the declared performance in this document. This declaration of performance is issued under the sole responsibility of the manufacturer mentioned above.*
 Podpisal za in v imenu proizvajalca: /Signed for and on behalf of the manufacturer by:

Giuliano Bo , vodja obrata / Plant manager

Pace del Mela, 19/01/21



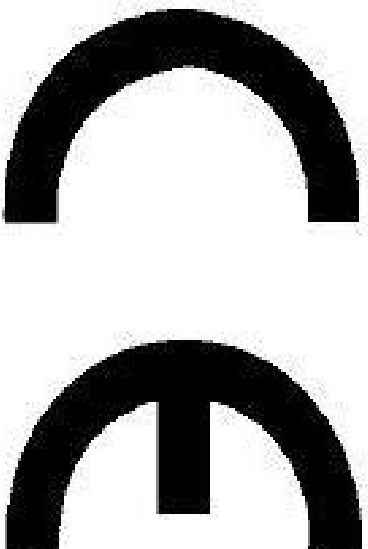

1608

DUFERCO TRAVI E PROFILATI S.p.A., Zona Industriale Giammoro, 98042 Pace del Mela (ME) Italia

09

1608 CPR P089

EN10025-1:2004

S275J0 +AR

Predvidena uporaba za proizvode iz konstrukcijskega jekla.

Intended to be used on products for structural steel.

Tolerance /tolerances:

Napetost tečenja /Yield strength

Natezna trdnost / tensile strength

Raztezek / elongation

Udarna trdnost / impact strength

Varivost / weldability CEV

: Izraženo kot navedeno v DoP
Espressed as indicated in the DoP

Trajnost / durability:

NPD