

**IZJAVA O LASTNOSTIH
 DECLARED PERFORMANCE**
03 № **TRANSPORTNI DOKUMENT/ Izjava št.**

1. Tip, kakovost: vroče valjan proizvod v skladu z **EN 10025-2:2004**.
 Tip: S355 kakovost: JR,J0,J2,K2.
Type, quality: hot rolled product in agreement with EN 10025-2:2004.
 Type: S355 grade: JR,J0,J2,K2.
2. Predvidena uporaba gradbenega proizvoda: vroče valjani proizvodi iz konstrukcijskega jekla.
Intended use of the construction product: hot rolled products of structural steel.
3. Ime in naslov proizvajalca:
Name and address of the manufacturer:
 DUFERCO TRAVI E PROFILATI S.p.A. stabilimento Giammoro
 Zona Industriale Giammoro
 98042 Pace del Mela (ME), Italia
 Tel. +39090938611- fax +390909385368
4. Ni določen
5. Sistem ocenjevanja in preverjanja nespremenljivosti lastnosti gradbenega proizvoda:
System of evaluation and verification of constancy of performance of the construction product:
2+
- 6a. Harmonizirani standard: **EN 10025-1:2004**
Harmonized standard: EN 10025-1:2004
 Priglašeni organ, ki je izdal certifikat o skladnosti tovarniške kontrole proizvodnje / *Notified body that issued the certificate of conformity of the factory production control:*
 № 1608 IGQ

7. Navedene lastnosti / Declared performance

Bistvene značilnosti / Essential characteristic	Lastnost / performance	Harmonizirana tehnična specifikacija / Harmonized technical specification	
Tolerance dimenzij in oblike / tolerances on dimensions and shape	EN10034 : 1993 EN10034 : 1993 EN10024 : 1995 EN10279 : 2000 EN10056-2 : 1993 EU91 : 1981 / DIN59200 : 2001 BS4-1 : 2005 EN 10059: 2003 EN 10060 : 2003	- razdelki HEA/B/M/ Sections HEA/B/M: 80 + 500.. - razdelki I/ Sections I: IPE80 + IPE550. - razdelki IPN/ Sections IPN: 80 + 400. - U in UPN razdelki / U and UPN sections: 30 + 120 mm. - enakokraki in neenakokraki kotniki / Equal and unequal leg angles: širina / width 30 + 80, debelina do/ up to 12 mm. - široko ploščato jeklo / wide flats : širina/ width 30 + 550 mm, debelina/thickness 5 + 40 mm. - BS univerzalne grede in stebri z debelino prirobnice do 12 mm / British universal beams and columns with flange thickness up to 12 mm - kvadratne palice / Square bars: 10 + 50 mm. - okrogle palice / Round bars: 12 + 50 mm.	EN 10025-1:2004
Napetost tečenja / yield strength (MPa)	Tip /kakovost Type/grade S355JR/J0/J2/K2	Nominalna debelina v mm / nominal thickness in mm ≤ 16 > 16 + ≤ 40 > 40 + ≤ 63 ≥ 355 ≥ 345 ≥ 335	
Natezna trdnost / tensile strength (MPa)	Tip /kakovost Type/grade S275JR/J0/J2/K2	Nominalna debelina v mm / nominal thickness in mm ≥ 3 + ≤ 100 470 + 630	
Raztezek / elongation %	Tip /kakovost Type/grade S355JR/J0/J2 S355K2	Nominalna debelina v mm / nominal thickness in mm ≥ 3 + ≤ 40 > 40 + ≤ 63 ≥ 22 ≥ 21 ≥ 20 ≥ 19	
Udarna trdnost / impact strength	Tip /kakovost Type/grade S355JR	Nominalna debelina v mm / nominal thickness in mm ≤ 150 Temperatura /temperature (°C) KV min 20 27	
	S355J0	0 27	
	S355J2	- 20 27	
	S355K2	- 20 40	
	Tip /kakovost Type/grade S355JR/J0/J2/K2	Nominalna debelina v mm / nominal thickness in mm ≤ 30 > 30 + ≤ 40 > 40 + ≤ 150 0,46 0,48	
Varivost / weldability CEV% max	Tip /kakovost Type/grade S355JR/J0/J2/K2	0,46 0,48	
Trajnost / durability	S355JR/J0/J2/K2	NPD (lastnost ni določena)	


- Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj. *The performance of the product is in conformity with the declared performance in this document. This declaration of performance is issued under the sole responsibility of the manufacturer mentioned above.*

Podpisal za in v imenu proizvajalca: /Signed for and on behalf of the manufactured by:

Giuliano Bo , vodja obrata / Plant manager

Pace del Mela, 19/01/21



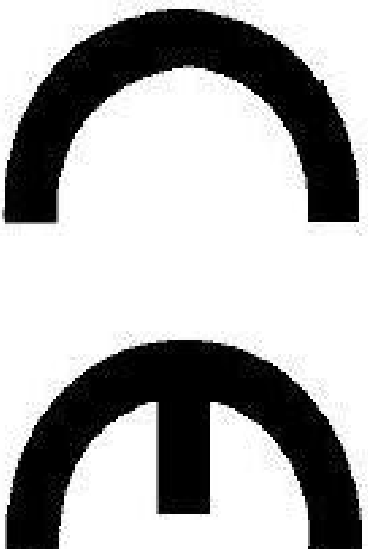

1608

DUFERCO TRAVI E PROFILATI S.p.A., Zona Industriale Giammoro, 98042 Pace del Mela (ME) Italia

09

1608 CPR P089

EN10025-1:2004

S355JR +AR

Predvidena uporaba za proizvode iz konstrukcijskega jekla.

Intended to be used on products for structural steel.

Tolerance /tolerances:

Napetost tečenja /Yield strength

Natezna trdnost / tensile strength

Raztezek / elongation

Udarna trdnost / impact strength

Varivost / weldability CEV

: Izraženo kot navedeno v DoP
Espressed as indicated in the DoP

Trajnost / durability:

NPD