

IZJAVA O LASTNOSTIH
 DECLARED PERFORMANCE
 TRANSPORTNI DOKUMENT/ Izjava št.

02 N°

1. Tip, kakovost: vroče valjan proizvod v skladu z EN 10025-2:2004.

Tip: S275 kakovost: JR,J0,J2.

Type, quality: hot rolled product in agreement with EN10025-2:2004.

Type: S275 grade: JR,J0,J2.

2. Predvidena uporaba gradbenega proizvoda: vroče valjani proizvodi iz konstrukcijskega jekla
-
- Intended use of the construction product: hot rolled products of structural steel.*

3. Ime in naslov proizvajalca:

Name and address of the manufacturer:

Travi e Profilati di Pallanzeno S.p.A.

Via Sempione 7

28884 Pallanzeno (VB), Italia

Tel. +3903245011 - fax +39032452705

4. Ni določen

5. Sistem ocenjevanja in preverjanja nespremenljivosti lastnosti gradbenega proizvoda:

System of evaluation and verification of constancy of performance of the construction product:

2+

- 6a. Harmonizirani standard : EN 10025-1:2004

Harmonized standard: EN 10025-1:2004

 Priglašeni organ, ki je izdal certifikat o skladnosti tovarniške kontrole proizvodnje/ Notified body
 that issued the certificate of conformity of the factory production control:

N° 1608 IGQ

7. Navedene lastnosti/ Declaration performance

Bistvene značilnosti /Essential characteristic	Lastnost / performance		Harmonizirana tehnična specifikacija /Harmonized technical specification
Tolerance dimenzij in oblike / tolerances on dimensions and shape	EN10034 : 1993	razdelki HEA/B od 100 do 200/section HEA/B form 100 to 200. HEM 100	EN 10025-1:2004
	EN10034 : 1993	razdelki I od IPE100 do IPE300/sections I from IPE100 to IPE300.	
	EN10024 : 1995	razdelki IPN od 160 do 240/ sections IPN from 160 to 240.	
	EN10279 : 2000	-U in UPN razdelki od 140 do 300 mm / U and UPN sections from 140 to 300 mm.	
	EN10056-2 : 1993	-enakokraki in neenakokraki kotniki do vključno 28 mm / equal and unequal angle up to: 35 mm	
Napetost tečenja / yield strength (MPa)	Tip /kakovost Type /grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0/J2	≤ 16 >16 to ≤40 275 265	
Natezna trdnost / tensile strength (MPa)	Tip /kakovost Type /grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0/J2	≤100 410 to 560	
Raztezek / elongation %	Tip /kakovost Type /grade	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0	≥3 ≤ 40 23	
	S275J2	21	
Udarna trdnost / impact strength	Tip /степень Tip /kakovost	Nominalna debelina v mm / nominal thickness in mm	
	S275JR	≤ 150 Temperatura /temperature KV min (joulov)	
	S275J0	+20 27	
	S275J2	0 27 -20 27	
Varivost / weldability CEV% max	Tip /степень Tip /kakovost	Nominalna debelina v mm / nominal thickness in mm	
	S275JR/J0/J2	≤ 30 >30 to ≤ 40 0,41 0,41	
	Trajnost / durability	S275JR/J0/J2	


- Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj. *The performance of the product is in conformity with the declared performance in this document. This declaration of performance is issued under the sole responsibility of the manufacturer mentioned above.*

Podpisal za in v imenu proizvajalca: /Signed for and on behalf of the manufactured by:

Massimo Lama, Vodja obrata/ Plant manager

Pallanzeno, 26/01/22



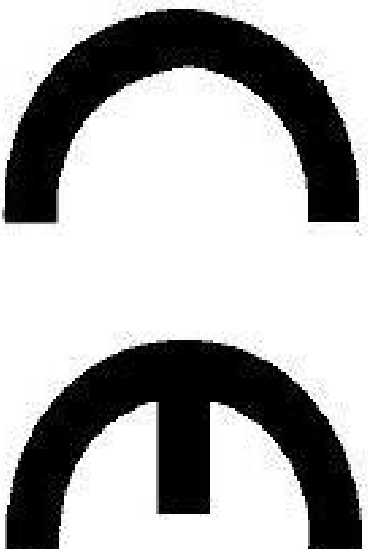

1608

Travi e Profilati di Pallanzeno s.p.a. via Sempione 7 - 28884 (VB), Italia

14

№ 1608 CPR P166

EN10025-1:2004

S275J0 +AR

Predvidena uporaba za proizvode iz konstrukcijskega jekla

Intended to be used on products for structural steel

Tolerance /tolerances:

Napetost tečenja /Yield strength

Natezna trdnost / tensile strength

Raztezek / elongation

Udarna trdnost / impact strength

Varivost / weldability CEV

: Izraženo kot navedeno v DoP
Espressed as indicated in the DoP

Trajnost / durability:

NPD