


Laminati per suole a un dente

Track shoes - Single grouser

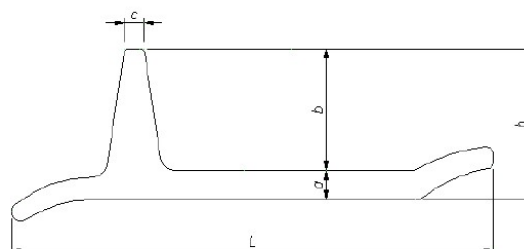

PROFILO PROFILE	N' Denti	L (mm)	a (mm)	b (mm)	c (mm)	h (mm)	Sez (cm ²)	Massa (Kg/m)
IS12	1	160	8	43	5	51	17,6	13,9
IS9/1	1	180	9	47	7	56	22,7	17,8
IS14	1	198	11,5	53	8	64,5	29,9	23,44
IS16/1	1	199,5	12	55	9,5	67	31,6	24,83
IS86/1	1	200	11	47	8	58	27,8	21,79
IS14/1	1	201	11	55	9,5	66	29,7	23,33
IS15/1	1	201	11,5	55	9,5	66,5	30,7	24,11
IS20/1	1	222	13,5	55,5	9	69	37,5	29,43
IS36K	1	232,5	12	65	10,5	77	38,9	30,57
IS36/1	1	236	12,3	57,7	10	70	37,5	29,42
IS68	1	242,5	19	84	22,6	103	67,6	53,09
IS37	1	245	14,7	71,5	12,7	86,2	48,6	38,15
IS31/1	1	247,6	15	71,4	22	86,4	56,9	44,7
IS30/1	1	247,6	16,6	71,4	22	88	60,8	47,76
IS42	1	263	19	77,5	25,5	96,5	71,0	55,75
IS34	1	276	17	76,5	14,5	93,5	61,61	48,36
IS124	1	285	17	84	25	101	74,3	58,33
IS125	1	285	20	84	25	104	82,56	64,81
IS63	1	298	22,5	101	32	123,5	106,61	83,69
IS45/1	1	301	20,5	87,5	28,5	108	90,5	71,05
IS75	1	305	20,5	93	28	113,5	92,8	72,81
IS98/1	1	322	23	93	31	116	106,9	83,89
IS88	1	369	25	102	32	127	131,55	103,66

DIMENSIONI E TOLLERANZE DIMENSIONALI E DI FORMA Dimensions and dimensional and shape tolerances:	TIPI E QUALITÀ DI ACCIAIO Steel grades and types
Secondo specifiche clienti According to customer specifications.	Acciai al boro da bonifica secondo norma UNI EN ISO 683-2 : 2018 "Acciai per trattamento termico, acciai legati e acciai automatici - Parte 2: Acciai legati da bonifica" o secondo specifica cliente. Boron-alloyed quenched and tempered steels in accordance with UNI EN ISO 683-2:2018 "Heat-treatable steels, alloy steels and free-cutting steels - Part 2: Alloy steels for quenching and tempering" or according to customer specifications.