


## Laminati per suole a due denti Track shoes - Double grouser

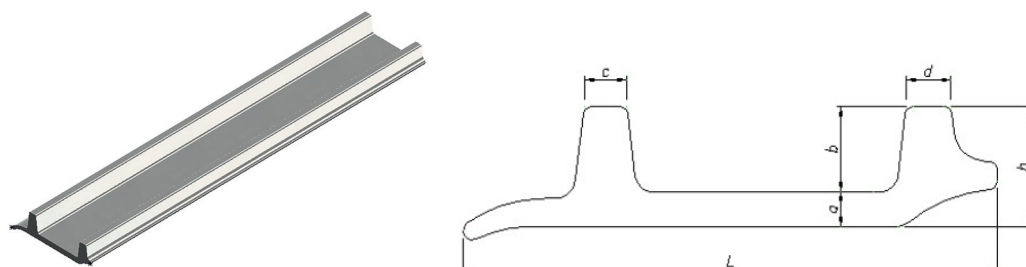

PROFILO PROFILE	N' Denti	L (mm)	a (mm)	b (mm)	c (mm)	d (mm)	h (mm)	Sez (cm <sup>2</sup> )	Massa (Kg/m)
IS50/1	2	306,0	20,5	50,0	33,0	33,0	70,5	92,15	72,34
IS54	2	297,0	24,0	52,0	30,0	30,0	76,0	99,49	78,10
IS56	2	219,0	13,0	35,0	19,9	19,9	48,0	41,94	32,92
IS74/1	2	306,0	23,5	50,0	33,0	33,0	73,5	101,07	79,34
IS84	2	306,0	25,0	50,0	33,0	33,0	75,0	105,52	82,84
IS95	2	197,0	11,0	37,0	14,0	14,0	48,0	33,06	25,95
IS96	2	234,0	14,0	42,5	19,5	19,5	56,5	49,89	39,16
IS97	2	250,0	15,0	49,5	23,0	23,0	64,5	61,81	48,52

DIMENSIONI E TOLLERANZE DIMENSIONALI E DI FORMA Dimensions and dimensional and shape tolerances:	TIPI E QUALITÀ DI ACCIAIO Steel grades and types
Secondo specifiche clienti According to customer specifications.	Acciai al boro da bonifica secondo norma UNI EN ISO 683-2 : 2018 "Acciai per trattamento termico, acciai legati e acciai automatici - Parte 2: Acciai legati da bonifica" o secondo specifica cliente.  Boron-alloyed quenched and tempered steels in accordance with UNI EN ISO 683-2:2018 "Heat-treatable steels, alloy steels and free-cutting steels - Part 2: Alloy steels for quenching and tempering" or according to customer specifications.