


Suole a due denti *Double grouser*

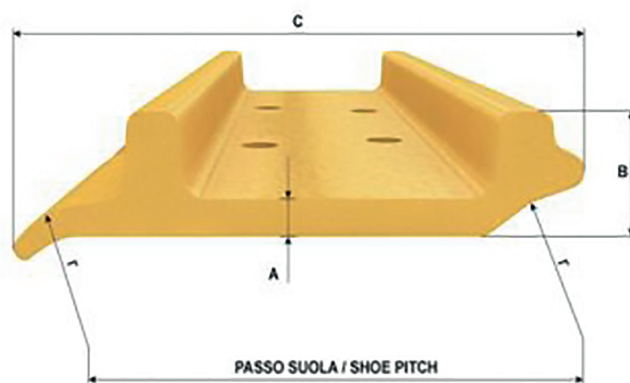

PROFILO SECTION	A mm.	B mm.	C mm.	PASSO SUOLA SHOE PITCH mm.	PASSO CATENA CHAIN PITCH mm.	PESO WEIGHT (Kg/m)
IS 95	11.0	48.0	197.0	171.0	170:176	25.70
IS 56	13.0	48.0	219.0	190.5	190.0	33.04
IS 96	14.0	56.5	234.0	199.0	203.2	38.83
IS 97	15.0	64.5	250.0	215.9	216.0	48.52
IS 50/1	20.5	70.5	306.0	260.5	260.5	71.80
IS 74/1	23.5	73.5	306.0	260.5	260.5	78.96
IS105	13	50	197	171	170:176	28,99
IS84	25	75	306	260,5	280	82,84

Le suole per macchine movimento terra, prodotte in acciaio al boro e trattate termicamente sono altamente resistenti all'usura anche in condizioni di terreno particolarmente abrasive.

Duferco Travi e Profilati track shoes supplied in boron steel heat treated are highly wear resistant also in a very abrasive ground condition.

SUOLE TRACK SHOES

SURFACE HARDNESS

as rolled max 248 HB
after heat treatment: HB 415 ÷ 515

TENSILE STRENGTH DA
N/MM²

min 1400

IMPACT STRENGTH KV (+20'a1 c)

> 20J